




PREMIUM SUPER DRY CUTTER 9435

THE BESTSELLER

Metal saw by Jepson Power for fast and burr free cutting of metal pipes and profiles without coolant

- Cuts ferrous and non-ferrous metal tubes, pipes and profiles made of mild steel, stainless steel, aluminum, plastic and composite materials
- No need of lubricant and manual deburring
- Exclusive blade stabilising system reduces vibration
- High torque motor for continuous operation
- Patented quick-release vice for bevel cuts
- Heavy duty angle cutting at 90-75-60-45°
- Fitted with a Ø 14"/90T (355/90T) carbide tipped saw blade
- Optional stand for a comfortable and save work place
- CE approved operating system

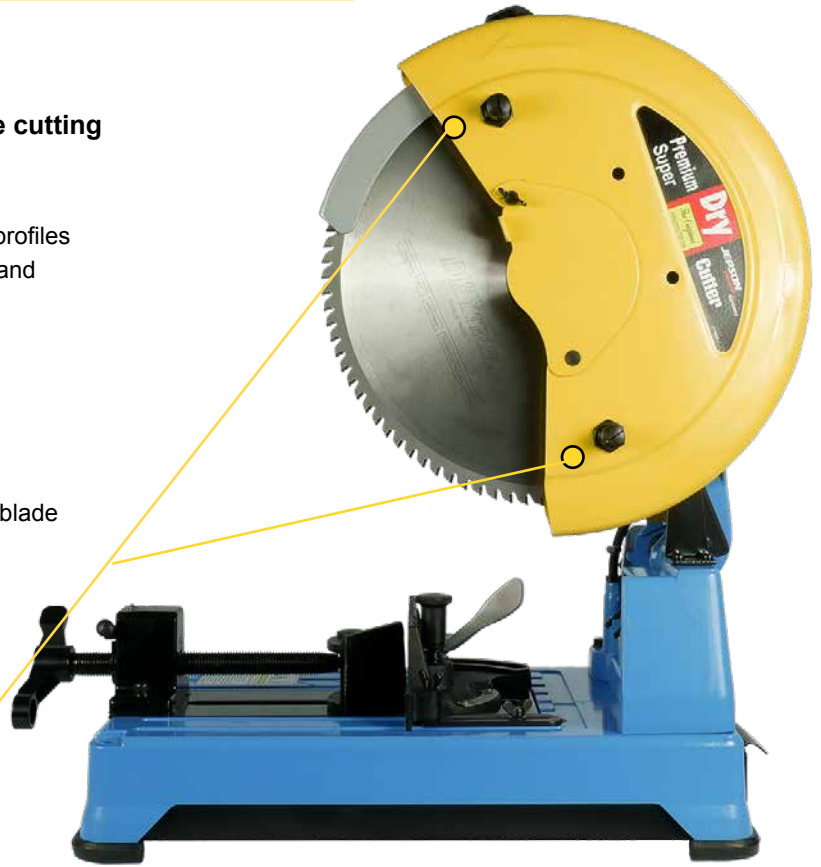

TWO PATENTED STABILIZERS FOR A BETTER CUTTING SURFACE AND LONG CUTTING LIFE



„K“ CLAMPING SET FOR SQUARE TUBES
For a safer and more stable sawing process (included)



QUICK RELEASE QUICK RELEASE SYSTEM
Enables precise and efficient clamping



RIP FENCE
Increased stability - makes it easier to saw short materials



MITER CUTS CAN BE ADJUSTED WITHOUT TOOLS
from 90-75-60-45°



CHIP COLLECTOR
For a clean workplace

Power input	Voltage	No load speed	Net weight	Blade size	Bore
21 amps	115V/50Hz	1.400 rpm	56 lbs/25kg	Ø 14" /355 mm	Ø 1"/25,4

Premium Super Dry Cutter 9435	Reference
with 14"/355 mm/90T saw blade	600560UST3

Max. cutting capacities	90°	45°
	Round	5,511"/140 mm
Square	4,921" x 4,921" 125 x 125 mm	3,149" x 3,149" 80 x 80 mm
Rectangular	4,133" x 6,102" 105 x 155 mm	2,952" x 3,937" 75 x 100 mm

Saw blades	Reference
Ø 14"/90T for steel and stainless steel - coated food and construction	600570NSF

Ø 14"/120T steel and stainless steel - extra thin	600512I
Ø 14"/90T steel and stainless steel - thin	600570S
Ø 14"/72T steel and stainless steel - medium	600580S
Ø 14"/60T steel and stainless steel - thick	600590
Ø 14"/60T - cast iron	600591S
Ø 14"/66T - mild steel	600595S
Ø 14"/96T - aluminum	600594

Accessories	Reference
Stand for PSDC 9435	600526T3
Eccentric clamping system	609910
Thinfix - Clamping system for open profiles	600546