


MAGPRO 40/2S

Scope of delivery:

Lashing strap, coolant tank, tools, chip protection, case

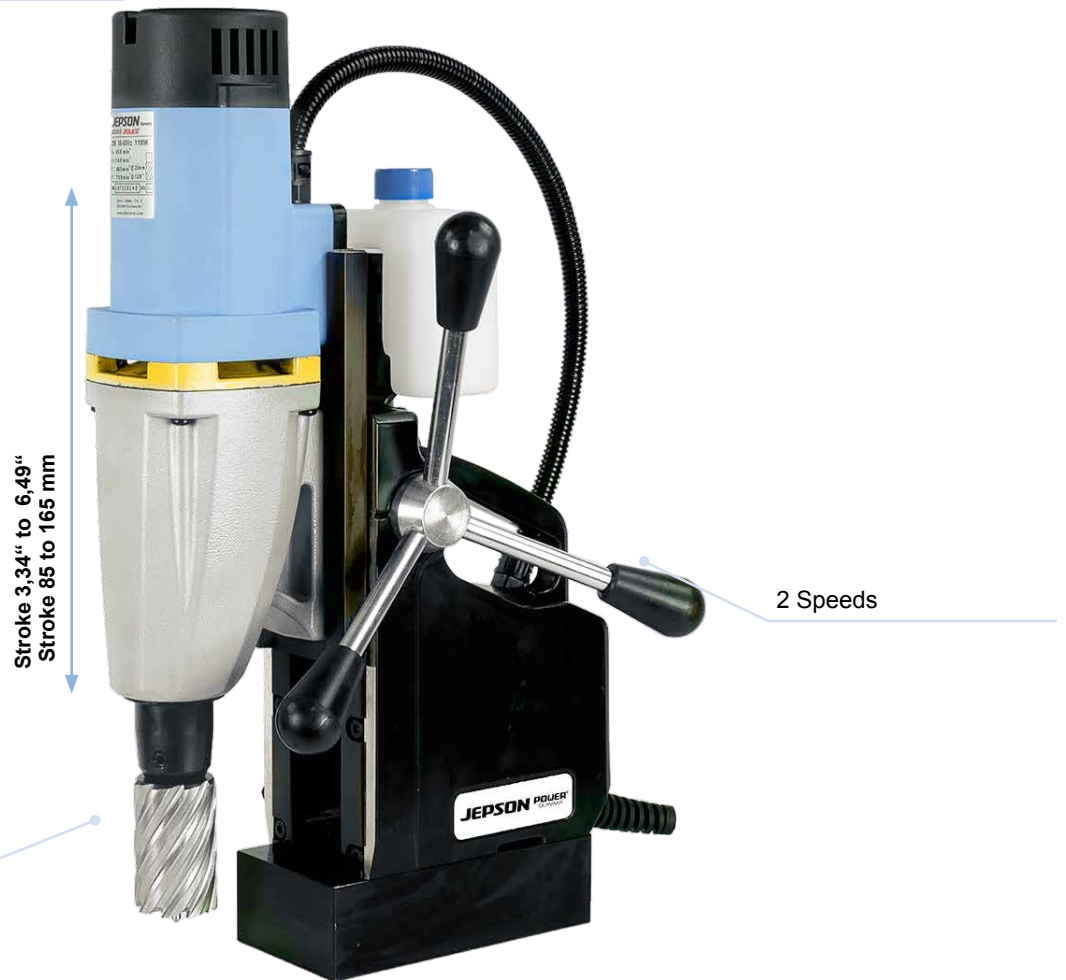

Core drilling
Twist drilling

2 Speeds



Optional: 0,51" / 13 mm drill chuck & adapter for direct use in the quick-release chuck
Art. 490152A



Generous stroke is easily adjustable

Technical specifications	
Power input	10 amps
Voltage	115 V / 60 Hz
No load speed / full load speed	1: 650 / 465 min ⁻¹ 2: 1100 / 790 min ⁻¹
Shank	3/4" / 19 mm Weldon
Core drill max. Ø x depth	0,47" - 1,57" x 4,33" 12 - 40 x 110 mm
Twist drill max. Ø x depth	0,511" x 5,51" 13 x 140 mm
Stroke	3,34" / 85 mm for core drilling, up to 6,49" / 165 mm for twist drilling
Magnet adhesion	17.000N
Magnetic base	6,69" x 3,34" / 170 x 85 mm
Coolant supply	integrated, automatic
Net weight	29 lbs/13 kg

Description	Reference
Magpro 40 / 2s delivery in a case lashing strap, service equipment and coolant tank	490142NA
Optional accessories	Reference
Core drill set Ø 9/16", 5/8", 11/16", 3/4", 13/16", 15/16" x 1 + ejector pin	490145IN
HSS-Co core drill set 1,18" / 30 mm Ø 12, 14, 16, 18, 20, 22 mm + ejector pin	490145
Carbide tipped core drill set 1,18" / 30 mm Ø 1x12, 1x14, 1x16, 1x18, 1x20, 1x22 mm + ejector pin	490148
„Goldfinger“ core drill set TiN-coated 30 mm Ø 12, 14, 16, 18, 20, 22 mm + ejector pin	490145TiN
Drill chuck and adapter 0,51" / 13 mm	490152A
Weldon adapter 3/4" / 19 mm for FEIN core drills with Quick-in holder and an ejector / centering pin	490154
Magnetic chip collector	490153
High-performance drilling and cutting oil spray for optimal cooling and higher cutting performance (Content: 400 ml)	490020